





BCV61 NPN General-purpose Double Transistor

Features

- Low Current.
- Low Voltage.
- Matched Pairs.

Applications

- Applications With Working Point Independent of Temperature.
- Current Mirrors.

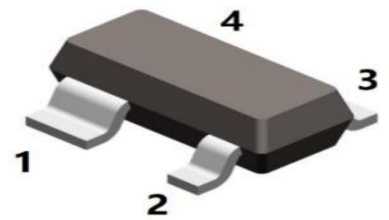

SOT-143

Ordering Information

Part Number	Package	Shipping	Marking Code
BCV61	SOT-143	3000 pcs / Tape & Reel	1M
BCV61A	SOT-143	3000 pcs / Tape & Reel	1J
BCV61B	SOT-143	3000 pcs / Tape & Reel	1K
BCV61C	SOT-143	3000 pcs / Tape & Reel	1L

Maximum Ratings (@T_A=25°C unless otherwise specified)

Symbol	Parameter	Value	Units
MAXIMUM RATINGS			
V _{CB0}	Collector-Base Voltage	30	V
V _{CEO}	Collector-Emitter Voltage	30	V
V _{EB0}	Emitter-Base Voltage	6	V
I _C	Collector Current - Continuous	0.1	A
I _{CM}	Collector Current - Peak	0.2	A
Thermal Characteristic			
P _{tot}	Total Power Dissipation, T _a ≤25°C	250	mW
T _J	Junction Temperature	150	°C
T _J , T _{stg}	Junction and Storage Temperature	-65 to +150	°C
R _{th(j-a)} (Note 1)	Thermal resistance from junction to ambient	500	°C/W



Electrical Characteristics (@T_A=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-Base Breakdown Voltage	V _{(BR)CBO}	I _C = 100μA, I _E = 0	30	-	-	V
Collector-Emitter Breakdown Voltage	V _{(BR)CEO}	I _C = 10mA, I _B = 0	30	-	-	V
Emitter-Base Breakdown Voltage	V _{(BR)EBO}	I _E = 100μA, I _C = 0	6	-	-	V
RCollector Cut-Off Current	I _{CBO}	V _{CB} = 30V, I _E = 0	-	-	15	nA
Emitter Cut-Off Current	I _{EBO}	V _{EB} = 5V, I _C = 0	-	-	100	nA
DC Current Gain (Note 1)	h _{FE}	V _{CE} = 5V, I _C = 100μA	100	-	-	
		V _{CE} = 5V, I _C = 2mA				
		BCV61	110		800	
		BCV61A	110		220	
		BCV61B	200		450	
BCV61C	420		800			
Collector-Emitter Saturation Voltage	V _{CE(sat)}	I _C = 10mA, I _B = 0.5mA I _C = 100mA, I _B = 5mA	-	0.09 0.2	0.25 0.6	V
Base-Emitter Saturation Voltage (Note 2)	V _{BE(sat)}	I _C = 10mA, I _B = 0.5mA I _C = 100mA, I _B = 5mA	-	0.7 0.9	-	V
Base-Emitter Turn-on Voltage (Note 3)	V _{BE(on)}	I _C = 2mA, V _{CE} = 5V	0.58	0.66	0.7	V
		I _C = 10mA, V _{CE} = 5V	-	-	0.77	
Transition Frequency	f _T	V _{CE} = 5V, I _C = 10mA, f = 100MHz	100	-	-	MHz
Collector Output Capacitance	C _{ob}	V _{CB} = 10V, I _E = 0, f = 1MHz	-	2.5	-	pF

Notes:


1: Device mounted on an FR4 PCB.

2: V_{BEsat} decreases by about 1.7 mV/K with increasing temperature.

3: V_{BE} decreases by about 2 mV/K with increasing temperature.




Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

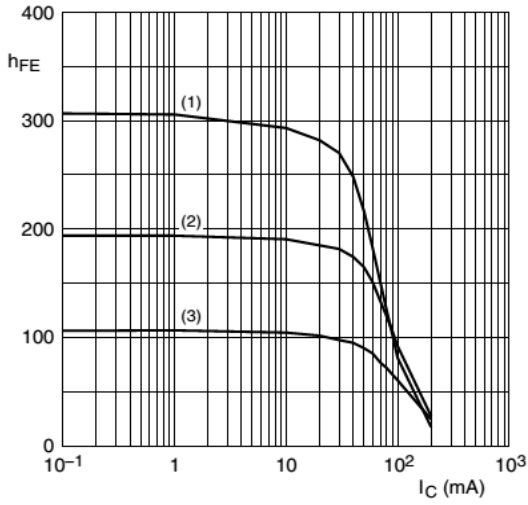


- $V_{CE} = 5\text{ V}$
- (1) $T_{amb} = 150^\circ\text{C}$
 - (2) $T_{amb} = 25^\circ\text{C}$
 - (3) $T_{amb} = -55^\circ\text{C}$

Fig 1. BCV61A: DC current gain as a function of collector current; typical values

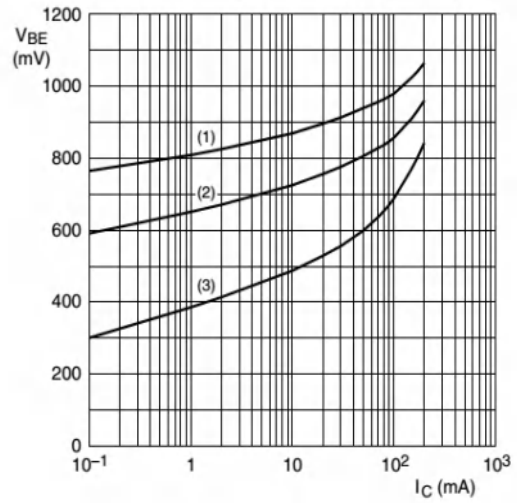


- $V_{CE} = 5\text{ V}$
- (1) $T_{amb} = -55^\circ\text{C}$
 - (2) $T_{amb} = 25^\circ\text{C}$
 - (3) $T_{amb} = 150^\circ\text{C}$

Fig 2. BCV61A: Base-emitter voltage as a function of collector current; typical values

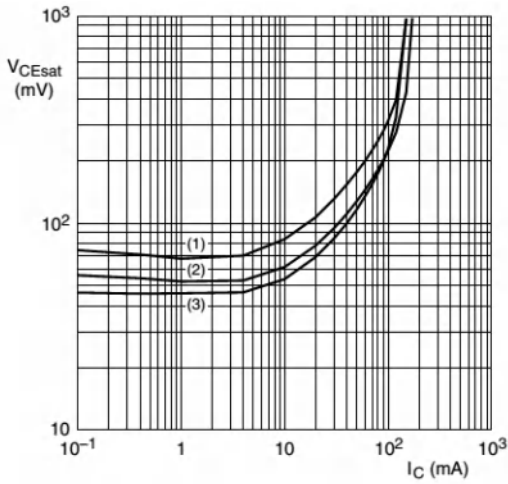


- $I_C/I_B = 20$
- (1) $T_{amb} = 150^\circ\text{C}$
 - (2) $T_{amb} = 25^\circ\text{C}$
 - (3) $T_{amb} = -55^\circ\text{C}$

Fig 3. BCV61A: Collector-emitter saturation voltage as a function of collector current; typical values

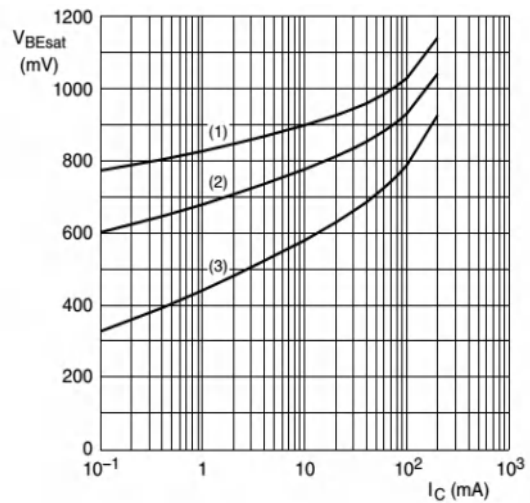


- $I_C/I_B = 10$
- (1) $T_{amb} = -55^\circ\text{C}$
 - (2) $T_{amb} = 25^\circ\text{C}$
 - (3) $T_{amb} = 150^\circ\text{C}$

Fig 4. BCV61A: Base-emitter saturation voltage as a function of collector current; typical values

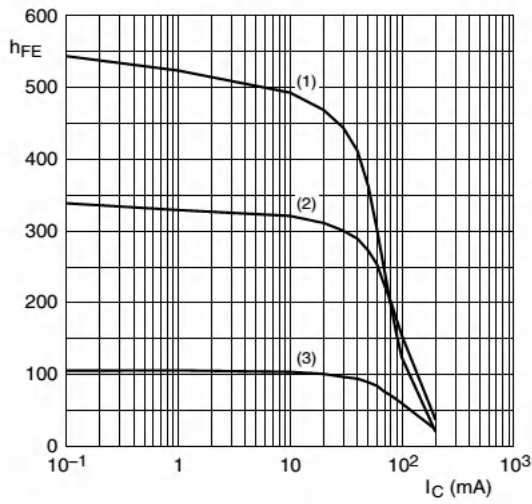


$V_{CE} = 5\text{ V}$
 (1) $T_{amb} = 150\text{ }^{\circ}\text{C}$
 (2) $T_{amb} = 25\text{ }^{\circ}\text{C}$
 (3) $T_{amb} = -55\text{ }^{\circ}\text{C}$

Fig 5. BCV61B: DC current gain as a function of collector current; typical values

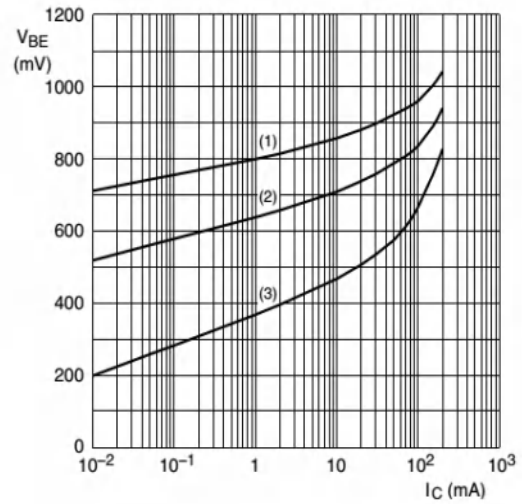


$V_{CE} = 5\text{ V}$
 (1) $T_{amb} = -55\text{ }^{\circ}\text{C}$
 (2) $T_{amb} = 25\text{ }^{\circ}\text{C}$
 (3) $T_{amb} = 150\text{ }^{\circ}\text{C}$

Fig 6. BCV61B: Base-emitter voltage as a function of collector current; typical values

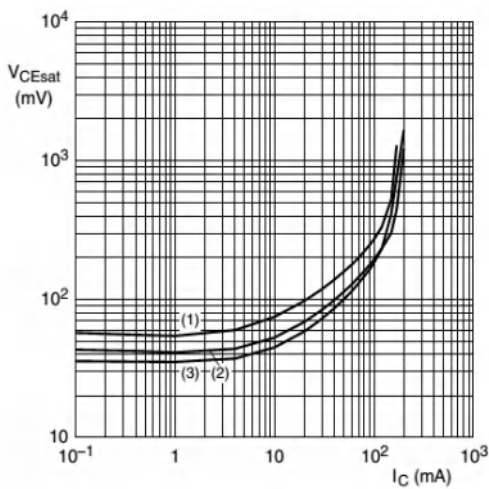


$I_C/I_B = 20$
 (1) $T_{amb} = 150\text{ }^{\circ}\text{C}$
 (2) $T_{amb} = 25\text{ }^{\circ}\text{C}$
 (3) $T_{amb} = -55\text{ }^{\circ}\text{C}$

Fig 7. BCV61B: Collector-emitter saturation voltage as a function of collector current; typical values

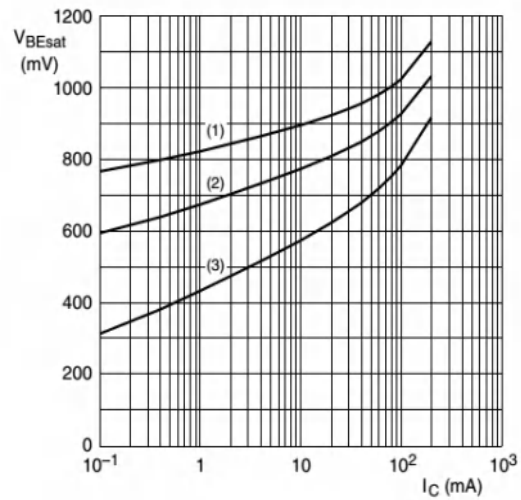


$I_C/I_B = 10$
 (1) $T_{amb} = -55\text{ }^{\circ}\text{C}$
 (2) $T_{amb} = 25\text{ }^{\circ}\text{C}$
 (3) $T_{amb} = 150\text{ }^{\circ}\text{C}$

Fig 8. BCV61B: Base-emitter saturation voltage as a function of collector current; typical values

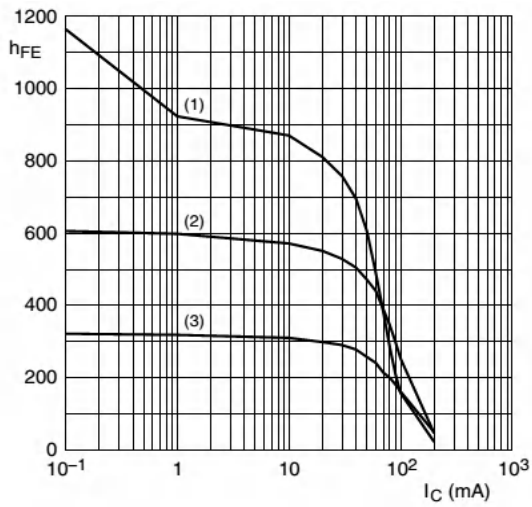


$V_{CE} = 5\text{ V}$
 (1) $T_{amb} = 150\text{ }^{\circ}\text{C}$
 (2) $T_{amb} = 25\text{ }^{\circ}\text{C}$
 (3) $T_{amb} = -55\text{ }^{\circ}\text{C}$

Fig 9. BCV61C: DC current gain as a function of collector current; typical values

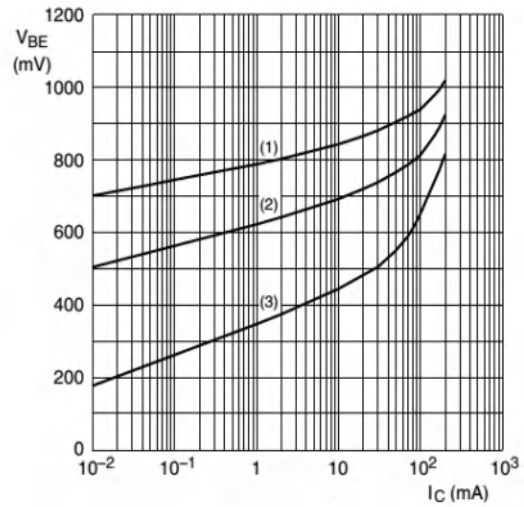


$V_{CE} = 5\text{ V}$
 (1) $T_{amb} = -55\text{ }^{\circ}\text{C}$
 (2) $T_{amb} = 25\text{ }^{\circ}\text{C}$
 (3) $T_{amb} = 150\text{ }^{\circ}\text{C}$

Fig 10. BCV61C: Base-emitter voltage as a function of collector current; typical values

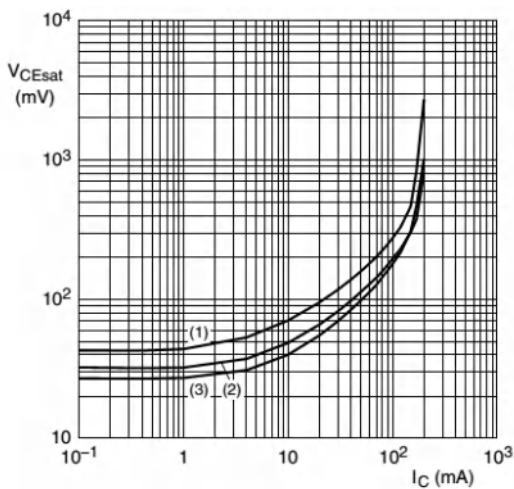

$I_C/I_B = 20$
 (1) $T_{amb} = 150\text{ }^{\circ}\text{C}$
 (2) $T_{amb} = 25\text{ }^{\circ}\text{C}$
 (3) $T_{amb} = -55\text{ }^{\circ}\text{C}$

Fig 11. BCV61C: Collector-emitter saturation voltage as a function of collector current; typical values

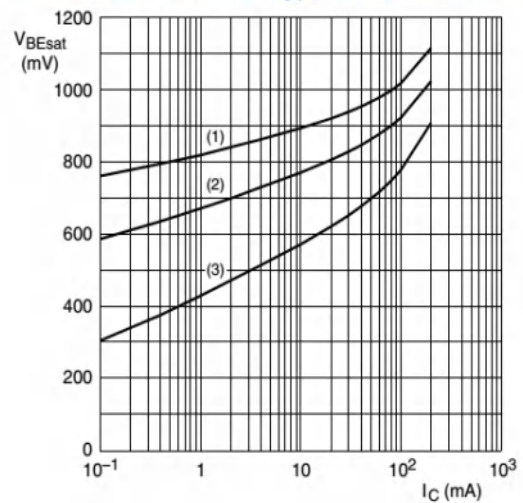

$I_C/I_B = 10$
 (1) $T_{amb} = -55\text{ }^{\circ}\text{C}$
 (2) $T_{amb} = 25\text{ }^{\circ}\text{C}$
 (3) $T_{amb} = 150\text{ }^{\circ}\text{C}$

Fig 12. BCV61C: Base-emitter saturation voltage as a function of collector current; typical values



Package Outline

Plastic surface mounted package

SOT-143

