





Victorlands Technical Specification

| | |
|----------------------------|----------------------------|
| Product name | Quartz crystal unit |
| Model | 2520/26.000MHz |
| Product code | K2C26000F3H4B2 |
| Product parameters | 7.3PF/±10PPM |
| Product reliability | P. 2-5 |
| Packing form | P. 6 |





- | | |
|--|---|
| 1. Frequency: | 26.000 MHZ |
| 2. Holder Type: | SMD2.5*2.0 |
| 3. Frequency Tolerance: | ± 10 ppm at $25^{\circ}\text{C} \pm 3^{\circ}\text{C}$ |
| 4. Equivalent Series Resistance: | 60 Ω Max |
| 5. Storage Temperature Range: | $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$ |
| 6. Operating Temperature Range: | $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$ |
| 7. Frequency Characteristics Over Temperature: | ± 20 ppm $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$ |
| 8. Load Capacitance (CL): | 7.3 PF |
| 9. Drive Level: | 100 μ W |
| 10. Shunt Capacitance: | 5PF MAX |
| 11. Insulation Resistance: | ≥ 500 M Ω Min at 100 V |
| 12. Mode Of Oscillation: | Fundamental |
| 13. Aging: | ± 3 ppm/Year |
| Marking description: | KYX26.000 |
| 14. Dimensions(mm): | |

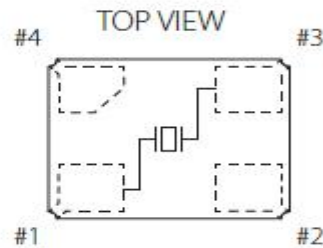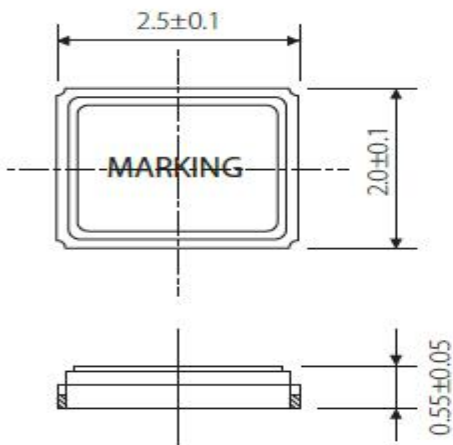


• #1,#3 : Crystal terminal / #2,#4 : Connected to cover
(Please connect it with GND.)

Example of a Terminal Land Pattern

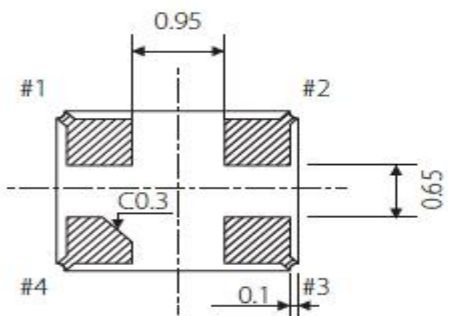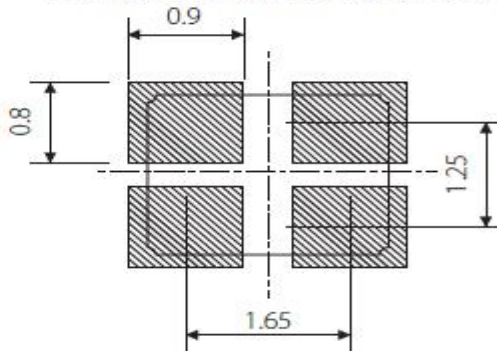



16. Structure Illustration

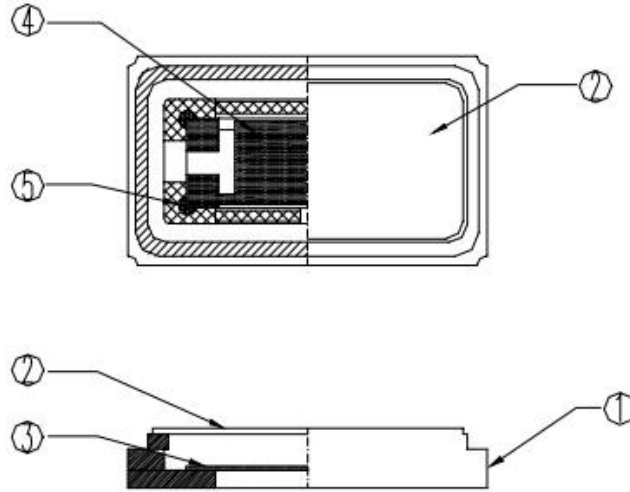

| PART NAME | | MATERIAL | PART NAME | | MATERIAL |
|-----------|-------|----------|-----------|-----------|-------------|
| 1. | BASE | CERAMIC | 4. | ELECTRODE | Metal |
| 2. | LID | Co | 5. | ADHESMES | SILVER GLUE |
| 3. | BLANK | QUARTZ | | | |




Reliability Testing

| Project | Test conditions and requirements | Request |
|---------------------|--|---------------------------------------|
| Vibration | Endurance condition by a frequency sweep shall be made. The entire frequency range from 10HZ to 50HZ and return to 10HZ, shall be transverseb in lmin. Amplitude(total excursion):1.5mm this motion shall be applied for a period of 2h each of 3 mutually perpendicular axes(a total of 6h) | (1). FL: +/-10ppm (2). Rr: +/-10 Ω |
| Drop | Form 70cm height 3 times on 3cm hard wooden floor | |
| Shock | Peak acceleration:981m/s ² duration of the pulse :6ms three successive shocks shall be applied in both direction of 3 mutually perpendicular axes(a total of 18 shocks) | (1). FL: +/-10ppm (2). Rr: +/-10 Ω |
| Damp heat, constant | The unit shall be stored at a temperature of 40°C ±2°C with relative humidity of 90%to95% for 48h, then it shall be subjected to standard atmospheric conditions for 1~2h after which measurement shall be made. | |
| Cold | The unit shall be stored at a temperature of -40°C ±5°C for 48h, then it shall be subjected to standard atmospheric conditions for 1~2h after which measurement shall be made. | |
| Dry heat | The unit shall be stored at a temperature of 100°C ±5°C for 24h, then it shall be subjected to standard atmospheric conditions for 1~2h after which measurement shall be made. | |
| Aging | The unit shall be stored at a temperature of 85°C ±5°C for 7d then it shall be subjected to standard atmospheric conditions for 1~2h after which measurement shall be made. | |
| Temperature cycling | The unit shall be subjected to 5 successive change of temperature cycles, each as show in table below, then it shall be subjected to standard atmospheric conditions for 1~2h after which measurement shall be made | |



| | Temperature | Duration |
|---|---------------------------------|------------|
| 1 | -40°C ± 3°C | 30min |
| 2 | Standard atmospheric conditions | Within 30s |
| 3 | 100°C ± 3°C | 30min |
| 4 | Standard atmospheric conditions | Within 30s |


Resistance to soldering heat

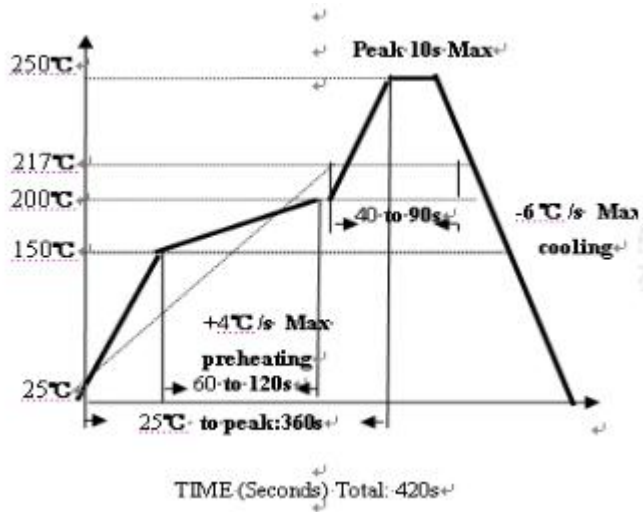



PACKING

1. CARRIER TYPE

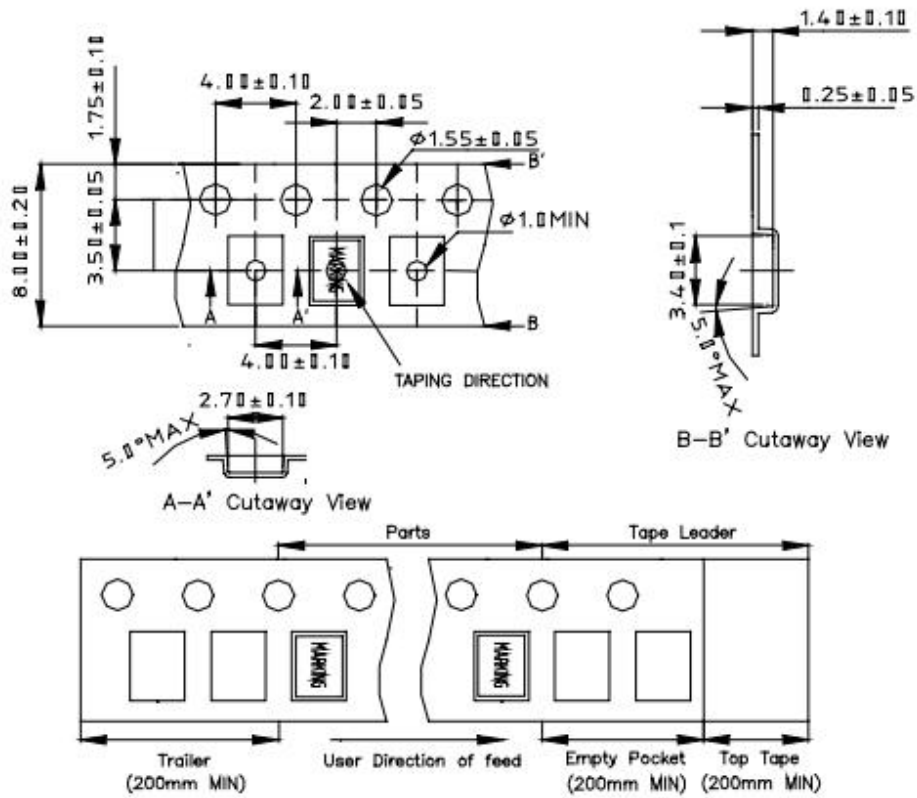

2. REEL : 3000 PCS

